
Graphite PTFE and Aramid Fiber in Zebra Braided Packing

Code: KXTP308



Description

Multi-yarns in zebra braided packing consisting of Graphite packing yarns and aramid fiber. Compared to P308B, it has excellent lubrication ability and thermal conductivity.

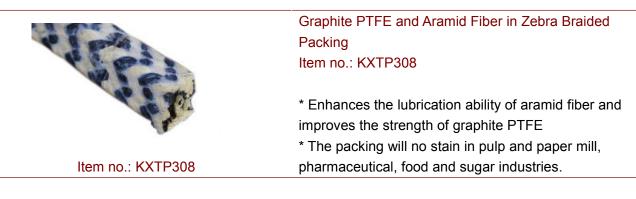

Typical Application

- * This is a universal packing which can be used for pumps in all types of industry.
- * Chemical, petrochemical, pharmaceutical, food and sugar industries, pulp and paper mills, etc.
- * Power stations

Technical Data

Material		Aramid fiber and graphite PTFE
Temperature Range		-100 up to +280 oC
Process	Rotating	25 bar
	Reciprocating	150 bar
	Static	200 bar
Shaft Speed		15 m/s
PH		2~12
Density		Appr. 1.5 g/cm3

Copyright © 2014-2015 Ningbo Kaxite Sealing Materials Co., Ltd. No.134,Huancheng North Road,Jiangbei District, Ningbo City,Zhejiang Province,China (Zip:315020) Website:<u>http://www.seal-china.com</u> E-mail:<u>sales@seal-china.com</u>